


AMS® Drill Floor-TRACTION MATTING



Modernize your operations with high-quality long-term solutions. This proven product line was engineered specifically for drill floors, creating heavy-duty matting with the highest coefficient of friction (COF) in the industry. The AMS® Drill Floor Traction Mat line delivers maximum safe footing from slips, trips, and falls. Included:

- ✓ Chemical, Corrosive & Diesel Resistant
- ✓ Stress & Impact Resistant
- ✓ Fire Retardant
- ✓ Aggressive Non-Skid Coating
- ✓ Long Lasting
- ✓ Customizable to Any Size or Shape
- ✓ Extreme Durability
- ✓ AMS® Color Sync
- ✓ High Traction Surface

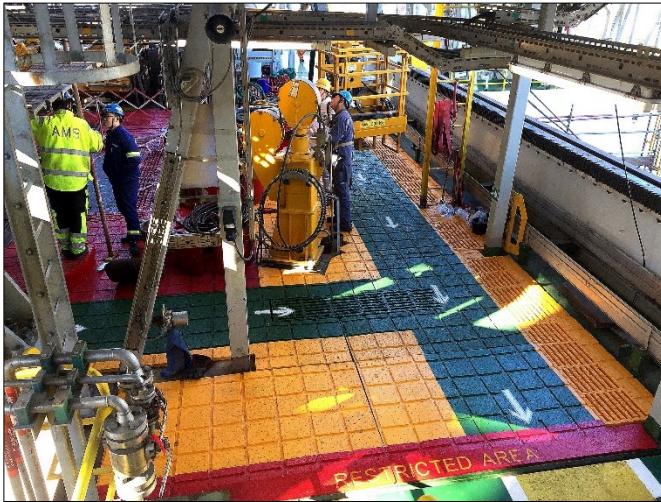


DRILL FLOOR TRACTION MATTING

Extensively used throughout the drilling industry these heavy-duty mats/treads deliver positive traction in extreme environments. Our pure polymer characteristics exceeds both the durability and lifespan compared to the competition. Our commitment to quality ensures that every component and final design goes through a stringent evaluation verifying the products performance, durability and effectiveness.

AMS® Drill Floor Traction Mats & Treads are available in different traction profiles allowing you to customize to your specific requirements with the human element. We offer:

- LP – Low Profile Molded Pattern of Varying Lug Heights
- SSS – Stainless Steel Studs
- SDC – Stainless Steel Studs with Molded Drainage Channels



AMS® Color Sync is an advancement we brought to industry. Each product manufactured will have the same color top to bottom. An important visual cue for safety, we offer 27 different colors to choose from or provide RAL code for color matching

Stairways are one of the highest risk areas for STF's. AMS® Traction Treads provide safe footing in active work environments.

- Easily Installed to Any Surface
- Lateral Mounting Holes Allow for Quick Fastening



MAINTENANCE & INSTALLATION

Routine housekeeping is just good practice. Light steaming, strong detergent with scrub brushes and/or non-flammable solvent will cut oil and grease. All matting is to be stored and/or transported flat. Resurfacing kits available. Installation methods are typical as all products can be secured with a variety of methods.

ONSITE SERVICES & SUPPORT

Our global onsite service and support allow for the very best in customer service, we can have boots on the ground or sea to assist in surveys, installation and commissioning.

AMS® Drill Floor-TRACTION MATTING




PRODUCT SPECIFICATIONS

AMS® Polymer Characteristics	Drill Floor TRACTION MAT	
Corrosive Resistant	Yes	
Chemical Resistant	Excellent	
Grease/Oil	Excellent	
Fungus Resistant	Non-nutrient	
Ultraviolet Stability	Yes	
Water Absorption %	Less Than 0.01%	
Shore Hardness (ASTM 2240-85)	75-85 Shore A	
Dielectric Properties	Electrically Dissipative	
	Metric	Imperial
Tensile Strength (ASTM 412 D - Die C)	33 Mpa	4,835 psi
Tear Strength (ASTM D 624)	132 kN/m	752 lbf/in
Elongation at Break (ASTM 412 D - Die C)	726%	
Service Temperature	-38°C to 93°C	-40°F to 200°F
Tested to FMVSS302 equiv. ISO 3795, ASTM D5132-04	Pass	
USCG Approval Cat.164.106 & 164.117	Not Applicable	

CUSTOMIZE WITH OUR VALUE-ADDED OPTIONS

Safety is visual. AMS® offers several value-added options. All options are molded directly into the matting ensuring longevity and high quality. Choose from:



Photoluminescent Markings




Embossed Logos




27 Colors



Beveled Edges



Embossed Text



Hazard Identification



Symbols



Puzzle Locks

ORDERING

AMS® Drill Floor Traction Mat P/N	Thickness(mm)	Traction Profile	Options	Size
DFTM-TC90-Thickness-Traction Profile	19, 25, 30, 32 or Custom	LP, SSS, SDC	Pick Any/All	AutoCAD or Supplied Dimensions required
AMS® Drill Floor Traction Tread P/N	Thickness(mm)	Traction Profile	Options	
DFTT-TC90-Thickness-Traction Profile	13, 15, 19, 25, 30, 32 or Custom	LP, SSS, SDC	Pick Any/All	
Average Weights: 1mm=1kg/m2				

Contact us anytime with questions or assistance at 1.403.910.1492 or sales@advancedmatsystems.com